



optimizar

un integrador

**Schneider
Electric**

IME

Integrador de
Monitoreo de Energía

Unidades de monitoreo de potencia Power Logic ION 8650



Schneider
Electric

ION8650

Functions and characteristics

PB107500



PowerLogic ION8650 socket meter

Used to monitor electric energy provider networks, service entrances and substations, PowerLogic ION8650 meters are ideal for independent power producers and cogeneration applications that need to accurately measure energy bi-directionally in both generation and stand-by modes. These meters give utilities the tools to manage complex energy supply contracts that include commitments to power quality. Integrate them with our ION Enterprise™ operations software or other energy management and SCADA systems through multiple communication channels and protocols, including Itron MV-90.

Applications

- Revenue metering
- Co-generation and IPP monitoring
- Compliance monitoring
- Power quality analysis
- Demand and power factor control
- Load curtailment
- Equipment monitoring and control
- Energy pulsing and totalisation
- Instrument transformer correction

Main characteristics

ANSI Class 0.2 and IEC 62053-22/23 Class 0,2S metering

For interconnection points on medium, high, and ultra-high voltage networks; twice as accurate as current IEC and ANSI Class 0.2 standards over all conditions and including single wide range current measurement.

Power quality compliance monitoring

Monitor compliance with international quality-of-supply standards (IEC 61000-4-30 Class A/S, EN50160, IEC 61000-4-7, IEC 61000-4-15, IEEE 1159, IEEE 519).

Digital fault recording

Simultaneous capture of voltage and current channels for sub-cycle disturbance transients.

Complete communications

Multi-port, multi-protocol ports including serial, infrared, modem and ethernet. Simultaneously supports multiple industry standard protocols including: Itron MV-90, Modbus, Modbus Master, DNP 3.0 and IEC 61850.

Multiple tariffs and time-of-use

Apply tariffs, seasonal rate schedules to measure energy and demand values for time periods with specific billing requirements.

Multiple setpoints for alarm and control functions

A total of 65 setpoints are configurable for 1-second or 1/2 - cycle operation.

Power quality summary

Consolidation of all the power quality characteristics into a single trendable index.

Integrate with software

Easily integrate with ION Enterprise operations software or other energy management systems; MV90, DNP, Modbus, IEC 61850.

Transformer/line loss compensation

Determine technical system losses in real time.

Instrument transformer correction

Save money and improve accuracy by correcting for less accurate transformers.

Alarm notification via email

High-priority alarms, data logs sent directly to the user's PC. Instant notification of power quality events by email.

Part numbers

ION8650 meters	
ION8650A	M8650A
ION8650B	M8650B
ION8650C	M8650C

See page 6 for complete part number descriptions.

Options

See page 7.

ION8650

Functions and characteristics (cont.)


PE6602-95



PowerLogic ION8650 meter with switchboard case

- 1 Terminals
- 2 Optical port
- 3 Main display status bar
- 4 Watt LED
- 5 Navigation, ALT/Enter buttons
- 6 VAR LED
- 7 Nameplate label
- 8 Demand reset switch

PE6602

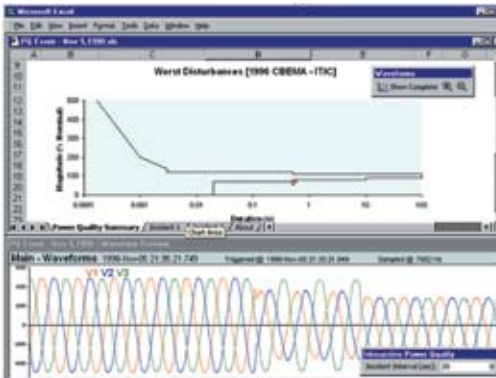


Disturbance waveform capture and power quality report

Selection guide	ION8650 A	ION8650 B	ION8650 C
General			
Use on LV and HV systems	■	■	■
Current accuracy	0.1 % reading	0.1 % reading	0.1 % reading
Voltage accuracy	0.1 % reading	0.1 % reading	0.1 % reading
Power accuracy	0.1 % reading	0.1 % reading	0.1 % reading
Samples/cycle	1024	1024	1024
Instantaneous values			
Current, voltage, frequency	■	■	■
Active, reactive, apparent power Total & per phase	■	■	■
Power factor Total & per phase	■	■	■
Current measurement range (autoranging)	0.01 - 20A	0.01 - 20A	0.01 - 20A
Energy values			
Active, reactive, apparent energy	■	■	■
Settable accumulation modes	■	■	■
Demand values			
Current Present & max. values	■	■	■
Active, reactive, apparent power Present & max. values	■	■	■
Predicted active, reactive, apparent power	■	■	■
Synchronisation of the measurement window	■	■	■
Demand modes: Block (sliding), thermal (exponential)	■	■	■
Power quality measurements			
Harmonic distortion Current & voltage	■	■	■
Individual harmonics Via front panel	63	63	31
Waveform and transient capture	■	-	-
Harmonics: magnitude, phase, and interharmonics	50	40	-
Detection of voltage sags and swells	■	■	■
IEC 61000-4-30 class A/S	A	S	-
IEC 61000-4-15 (Flicker)	■	■	-
High speed data recording (down to 10 ms)	■	■	-
EN50160 compliance reporting	■	■	-
Programmable (logic and math functions)	■	■	■
Data recording			
Onboard Memory (in Mbytes)	128	64	32
Revenue logs	■	■	■
Event logs	■	■	■
Historical logs	■	■	■
Harmonics logs	■	■	■
Sag/swell logs	■	■	■
Transient logs	■	-	-
Time stamping to 1 ms	■	■	■
GPS synchronisation (IRIG-B standard)	■	■	■
Display and I/O			
Front panel display	■	■	■
Wiring self-test (requires PowerLogic ION Setup)	■	■	■
Pulse output (front panel LED)	2	2	2
Digital or analogue inputs ⁽¹⁾ (max)	11	11	11
Digital or analogue outputs ⁽¹⁾ (max, including pulse output)	16	16	16
Direct connection voltage	277V ⁽²⁾	277V ⁽²⁾	277V ⁽²⁾
Communication			
Infrared port	1	1	1
RS 485 / RS 232 port	1	1	1 ⁽³⁾
RS 485 port	1	1	1 ⁽³⁾
Ethernet port (Modbus/TCP/IP protocol) with gateway	1	1	1 ⁽³⁾
Internal modem with gateway (ModemGate)	1	1	1 ⁽³⁾
HTML web page server (WebMeter)	■	■	■
IRIG-B port (unmodulated IRIG B00x time format)	1	1	1
Modbus TCP Master / Slave (Ethernet port)	■ / ■	■ / ■	- / ■
Modbus RTU Master / Slave (Serial ports)	■ / ■	■ / ■	- / ■
DNP 3.0 through serial, modem, and I/R ports	■	■	■

(1) With optional I/O Expander.

(2) For 9S, and 36S only. For 35S system up to 480V line-to-line.

(3) Infrared port plus two other communications ports maximum

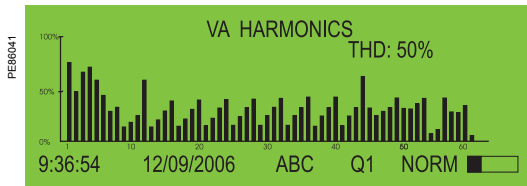

PowerLogic ION8650 front panel harmonic display.



ION8650 front panel phasor display and table.

Electrical characteristics

Type of measurement		True rms 1024 samples per cycle
Measurement accuracy	Current and voltage	0.1 % Reading
	Power	0.1%
	Frequency	±0.001 Hz
	Power factor	0.1%
	Energy	0.1%, twice as accurate as ANSI Class 0.2 and IEC 62053-22/23 (0,2S)
Data update rate		0.5 cycle or 1 second (depending on value)
Input-voltage characteristics (1)	Nominal voltage	57V to 277VLL rms autoranging (9S) 100V to 480VLL rms autoranging (35S)
	Maximum voltage	347 VLN rms, 600 VLL rms (9S) 600 VLL rms (35S)
	Impedance	5 MΩ /phase (phase-Uref/Ground)
	Inputs	V1, V2, V3, VREF
Input-current characteristics	Rated nominal/current class	1A, 2 A, 5 A and/or 10 A (Class 1/2/10/20)
	Accuracy range	0.01 - 20 A autoranging (standard range)
	Measurement range	0 001 - 24 A
	Permissible overload	500A rms for 1 second, non-recurring (standard)
Burden per phase	Socket	0.05VA at 5A (0.002 Ω max)
	Switchboard	0.05VA at 1A (0.05 Ω max)
Power supply	Standard power supply, 120-277 VAC	120-277 VLN RMS (-15%/+20%) 47-63 Hz or 120-480 VLL RMS (-15%/+20%) 47-63 Hz (35S)
	Auxiliary power cable assembly, 65-120 VAC	AC: 65-120 (+/- 15%) VLN RMS, 47-63 Hz DC: 80-160 (+/- 20%) VDC
	Auxiliary power cable assembly, 160-277 VAC	AC: 160-277 (+/- 20%) VLN RMS, 47-63 Hz DC: 200-300 (+/- 20%) VDC
	Ride-through time, 120-277 VAC (Standard power supply)	Min 100 ms (6 cycles at 60 Hz at 96 VAC), 200 ms (12 cycles at 60 Hz at 120 VAC), 800 ms (48 cycles at 60 Hz at 240 VAC)
Input/outputs	Digital outputs (Form C)	4 Solid state relays (130 V AC/ 200 V DC) 50 mA AC/DC
	Digital outputs (Form A)	4 Solid state relays (via optional I/O Expander)
	Digital inputs	4 Solid state inputs (via optional I/O Expander)

Mechanical characteristics

Weight		7.0 kg
IP degree of protection	Socket	Front IP65, back IP51
	Switchboard	Front IP50, back IP30
Dimensions	Socket	178 x 237 mm
	Switchboard	285 x 228 x 163 mm

Environmental conditions

Operating temperature		-40°C to +85°C
Display operating range		-20°C to +60°C
Storage temperature		-40°C to +85°C
Humidity rating		5 to 95 % RH non-condensing
Pollution degree		2
Installation category		Cat III
Dielectric withstand		2.5kV, 50Hz, 1 min


Electromagnetic compatibility

Electrostatic discharge		IEC 61000-4-2
Immunity to radiated fields		IEC 61000-4-3
Immunity to fast transients		IEC 61000-4-4
Immunity to surge		IEC 61000-4-5
Immunity conducted		IEC61000-4-6
Damped oscillatory waves immunity		IEC61000-4-12
Conducted and radiated emissions		CISPR 22 (class B)


Safety

Europe		As per IEC62052-11
North America		As per ANSI C12.1

(1) Specifications are limited by the operating range of the power supply if a non-aux power supply is used.

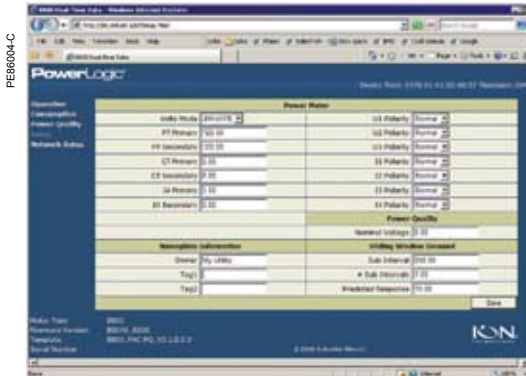

Example embedded webserver page (WebMeter) showing real-time values.

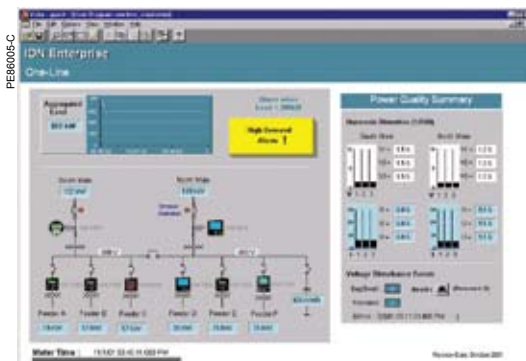

Communication

RS 232 / RS 485 port (COM1)	User-selectable RS 232 or RS 485. 300 - 115,200 bauds (RS485 limited to 57,600 bps); protocols: ION, Modbus/RTU/Mastering, DNP 3.0, GPSTRUETIME/DATUM.
Internal modem port (COM2)	300 bps-57,600 bauds (automatic detection supported)
ANSI 12.18 Type II optical port (COM3)	Up to 19200 bauds
RS 485 port (COM4)	Up to 57,600 bauds, Modbus, direct connection to a PC or modem
Ethernet port	10/100 BaseT, RJ45 connector, protocols: DNP, ION, Modbus/TCP/Mastering, IEC 61850
EtherGate	Up to 31 slave devices via serial ports
ModemGate	Up to 31 slave devices
Embedded web server (WebMeter)	4 standard pages, up to 5 customisable pages

Firmware characteristics

High-speed data recording	Up to 1/2-cycle interval burst recording, stores detailed characteristics of disturbances or outages. Trigger recording by a user-defined setpoint, or from external equipment. Can log data only during critical event to conserve memory
Harmonic distortion	Up to 63rd harmonic for all voltage and current inputs
Dip/swell detection	Analyse severity/potential impact of dips and swells: - magnitude and duration data suitable for plotting on voltage tolerance curves - per phase triggers for waveform recording or control operations
Instantaneous	High accuracy (1s) and high-speed (1/2 cycle) measurements, including true rms per phase / total for: - voltage and current - active power (kW) and reactive power (kVAR) - apparent power (kVA) - power factor and frequency - voltage and current unbalance - phase reversal
Load profiling	Channel assignments are user configurable: - 800 channels via 50 data recorders (feature set A), - 720 channels via 45 data recorders (feature set B), - 64 channels via 4 data recorders (feature set C). Configure for historical trend recording of energy, demand, voltage, current, power quality, other measured parameter. Recorders can trigger on time interval basis, calendar schedule, alarm/event condition, manually.
Waveform captures	Simultaneous capture of all voltage and current channels - sub-cycle disturbance capture (16 to 1024 samples/cycle)
Alarms	Threshold alarms: - adjustable pickup and dropout setpoints and time delays, numerous activation levels possible for a given type of alarm - user-defined priority levels - boolean combination of alarms possible
Advanced security	Up to 16 users with unique access rights. Perform resets, time syncs, or meter configurations based on user privileges.
Transformer correction	Correct for phase / magnitude inaccuracies in current transformers (CTs), potential transformers (PTs)
Memory	32 Mbytes (C), 64 Mbytes (B), 128 Mbytes (A)
Firmware update	Update via the communication ports


Display characteristics

Type	FSTN transreflective LCD
Backlight	LED
Languages	English

ION8650

Functions and characteristics (cont.)

PE86043 C



Example product part number.

- 1 Model.
- 2 Feature set.
- 3 Form factor.
- 4 Current Inputs.
- 5 Voltage inputs.
- 6 Power supply.
- 7 System frequency.
- 8 Communications.
- 9 Input/output options.
- 10 Security.
- 11 Special order options.

PowerLogic ION8650 meter with switchboard case

PB107507



Part Numbers

Item	Code	Description
1 Model	M8650	Schneider Electric advanced tariff meter.
2 Feature Set	A	128MB Memory Class A power quality analysis, waveforms and transient capture with 1024 samples/cycle.
	B	64MB memory, energy meter Class S EN50160 power quality monitoring.
	C	32MB memory, basic tariff/energy metering (4 data recorders, 64 channels).
3 Form Factor (1)	0	Form 9S/29S/36S Base, 57-277 VLN (autoranging) 3-Element, 4-Wire / 2 1/2-Element, 4-Wire
	1	Form 35S Base - 120-480 VLL (autoranging) 2-Element, 3-Wire
	4	Form 9/29/35/36S FT21 Switchboard (meter + case) with break out panel
	7	Form 9/29/35/36S FT21 Switchboard (meter + case) with break out cable
4 Current Inputs	C	1, 2 or 5 Amp nominal, 20 Amp full scale (24 Amp fault capture, start at 0.001 A)
5 Voltage Inputs	0	Standard (see Form Factor above)
6 Power Supply	E	Form 9/29/35/36S, (socket) and Form 9, 36 (FT21 switchboard): 120-277 VAC. Form 35S (socket) and Form 35 (FT21 switchboard): 120-480 VAC. Powered from the meter's voltage connections, low end measurement range limited to 120 VLL.
	H	Auxiliary Power Pigtail: 65-120 VAC or 80-160 VDC (power from external source)
	J	Auxiliary Power Pigtail: 160-277 VAC or 200-300 VDC (power from external source)
7 System Frequency	5	Calibrated for 50 Hz systems.
	6	Calibrated for 60 Hz systems.
8 Communications	A 0	Infrared optical port, RS 232/RS 485 port, RS 485 port
	C 1	Infrared optical port, Ethernet (10/100 BaseT), RS 232/485 port, RS 485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)), 56k universal internal modem (RJ11)
	M 1	Infrared optical port, RS 232/485 port, RS 485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)), 56k universal internal modem (RJ11)
	E 0	Infrared optical port, Ethernet (10/100 BaseT), RS 232/485 port, RS 485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)).
9 Onboard I/O	A	None.
	B	4 Form C digital outputs, 3 Form A digital inputs.
	C	4 Form C digital outputs, 1 Form A digital output, 1 digital input.
10 Security	0	Password protected, no security lock
	1	Password protected with security lock enabled (requires removal of outer cover to configure billing parameters)
	3	RMICAN (Measurement Canada approved)
	4	RMICAN-SEAL (Measurement Canada approved, and factory sealed)**
11 Special Order	A	None

(1) Specifications are limited by the operating range of the power supply if a non-aux power supply is used.



Example order code. Use this group of codes when ordering the I/O Expander.

- 1 Digital / Analog I/O.
- 2 I/O option.
- 3 Cable option.



Part numbers (cont.)

I/O Expander

Digital/Analog I/O	P850E	Schneider Electric I/O Expander for ION8600 meters: Inputs and Outputs for energy pulsing, control, energy counting, status monitoring, and analog interface to SCADA.
I/O option	A	External I/O box with 8 digital inputs and 8 digital outputs (4 Form A, 4 Form C)
	B	External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analog outputs (0 to 20mA)
	C	External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analog outputs (-1mA to 1mA)
	D	External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analog outputs (two -1 to 1 mA, and two 0 to 20 mA outputs)
Cable option	0	No cable - cables for the I/O box are no ordered as a separate part number. Refer to part numbers: CBL-8X00IOE5FT, CBL-8X00IOE15FT and CBL-8XX0-BOP-IOBOX under Connector cables, below.

A-base adapters

A-BASE-ADAPTER-9	Form 9S to Form 9A adapter
A-BASE-ADAPTER-35	Form 35S to Form 35A adapter

Optical communication interface

OPTICAL-PROBE	Optical communication interface
----------------------	---------------------------------


Connector cables

CBL-8X00BRKOUT	5ft Breakout Cable: 24-pin female Molex connector to one DB9 female connector for RS 232, and 2 sets of twisted pair wires for two RS 485 port connections
CBL-8X00IOE5FT	5ft extension cable, mates with 24-pin male Molex connector from the meter to the 24-pin female Molex connector on the I/O Expander box (not for use with breakout panel E8, F8 & G8 form factors)
CBL-8X00IOE15FT	15ft extension cable, mates with 24-pin male Molex connector from the meter to the 24-pin female Molex connector on the I/O Expander box (not for use with breakout panel E8, F8 & G8 form factors)
CBL-8XX0-BOP-IOBOX	6ft connector cable, 24-pin male to 14-pin male Molex connector for connecting an ION8650 meter with breakout panel to an I/O Expander Box


ION8650

Installation and connections


ION8650 socket dimensions

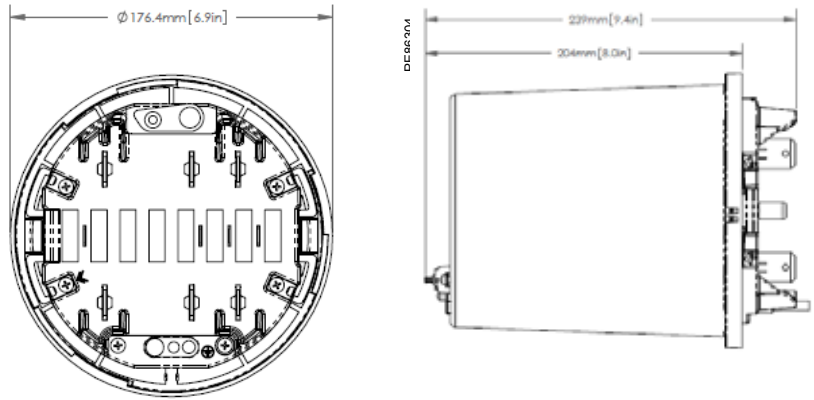

ION8650 switchboard dimensions

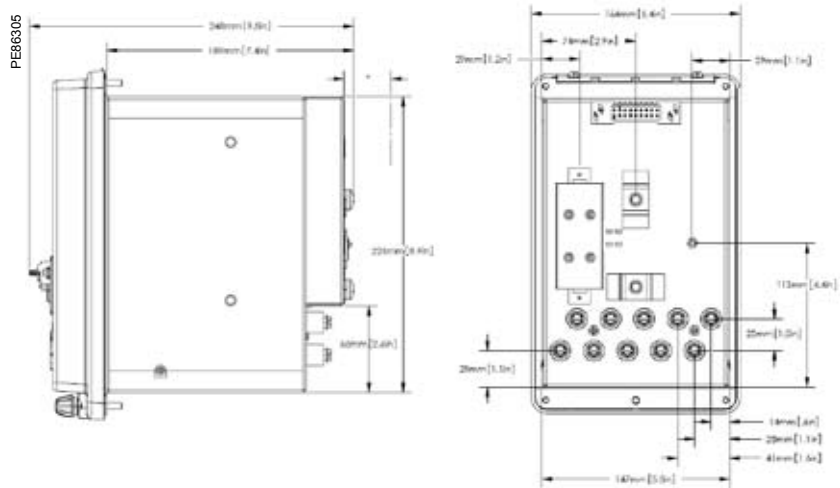


I/O Expander dimensions

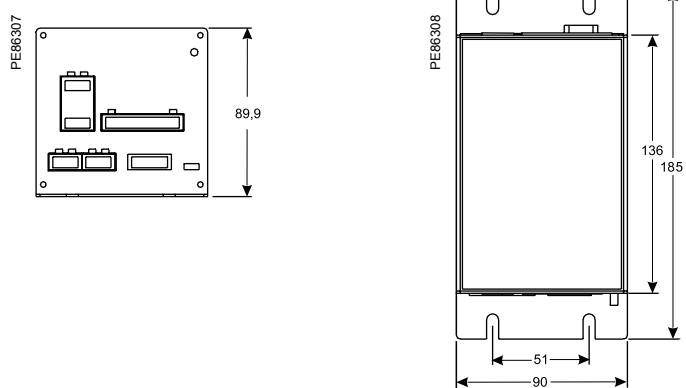


ION8650

Installation and connections (cont.)

ION8650 suggested switchboard mounting dimensions

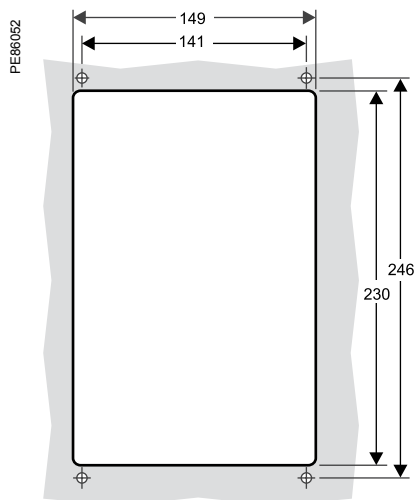

ION8650 switchboard mounting

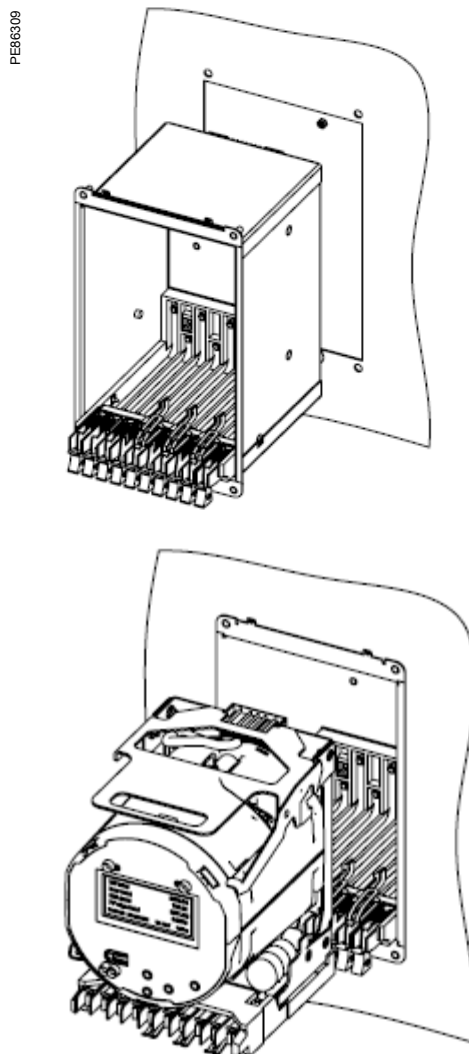



optimizar



Integrador de
Monitoreo de Energía

Unidades de monitorio de potencia Power Logic ION 8650

PowerLogic ION 8650 | Funciones y características

Solo el personal cualificado puede instalar, manipular, revisar y realizar el mantenimiento del equipo electrónico.

Para obtener ayuda adicional, póngase en contacto con nosotros en: www.optimizar.com.ar / info@optimizar.com.ar